



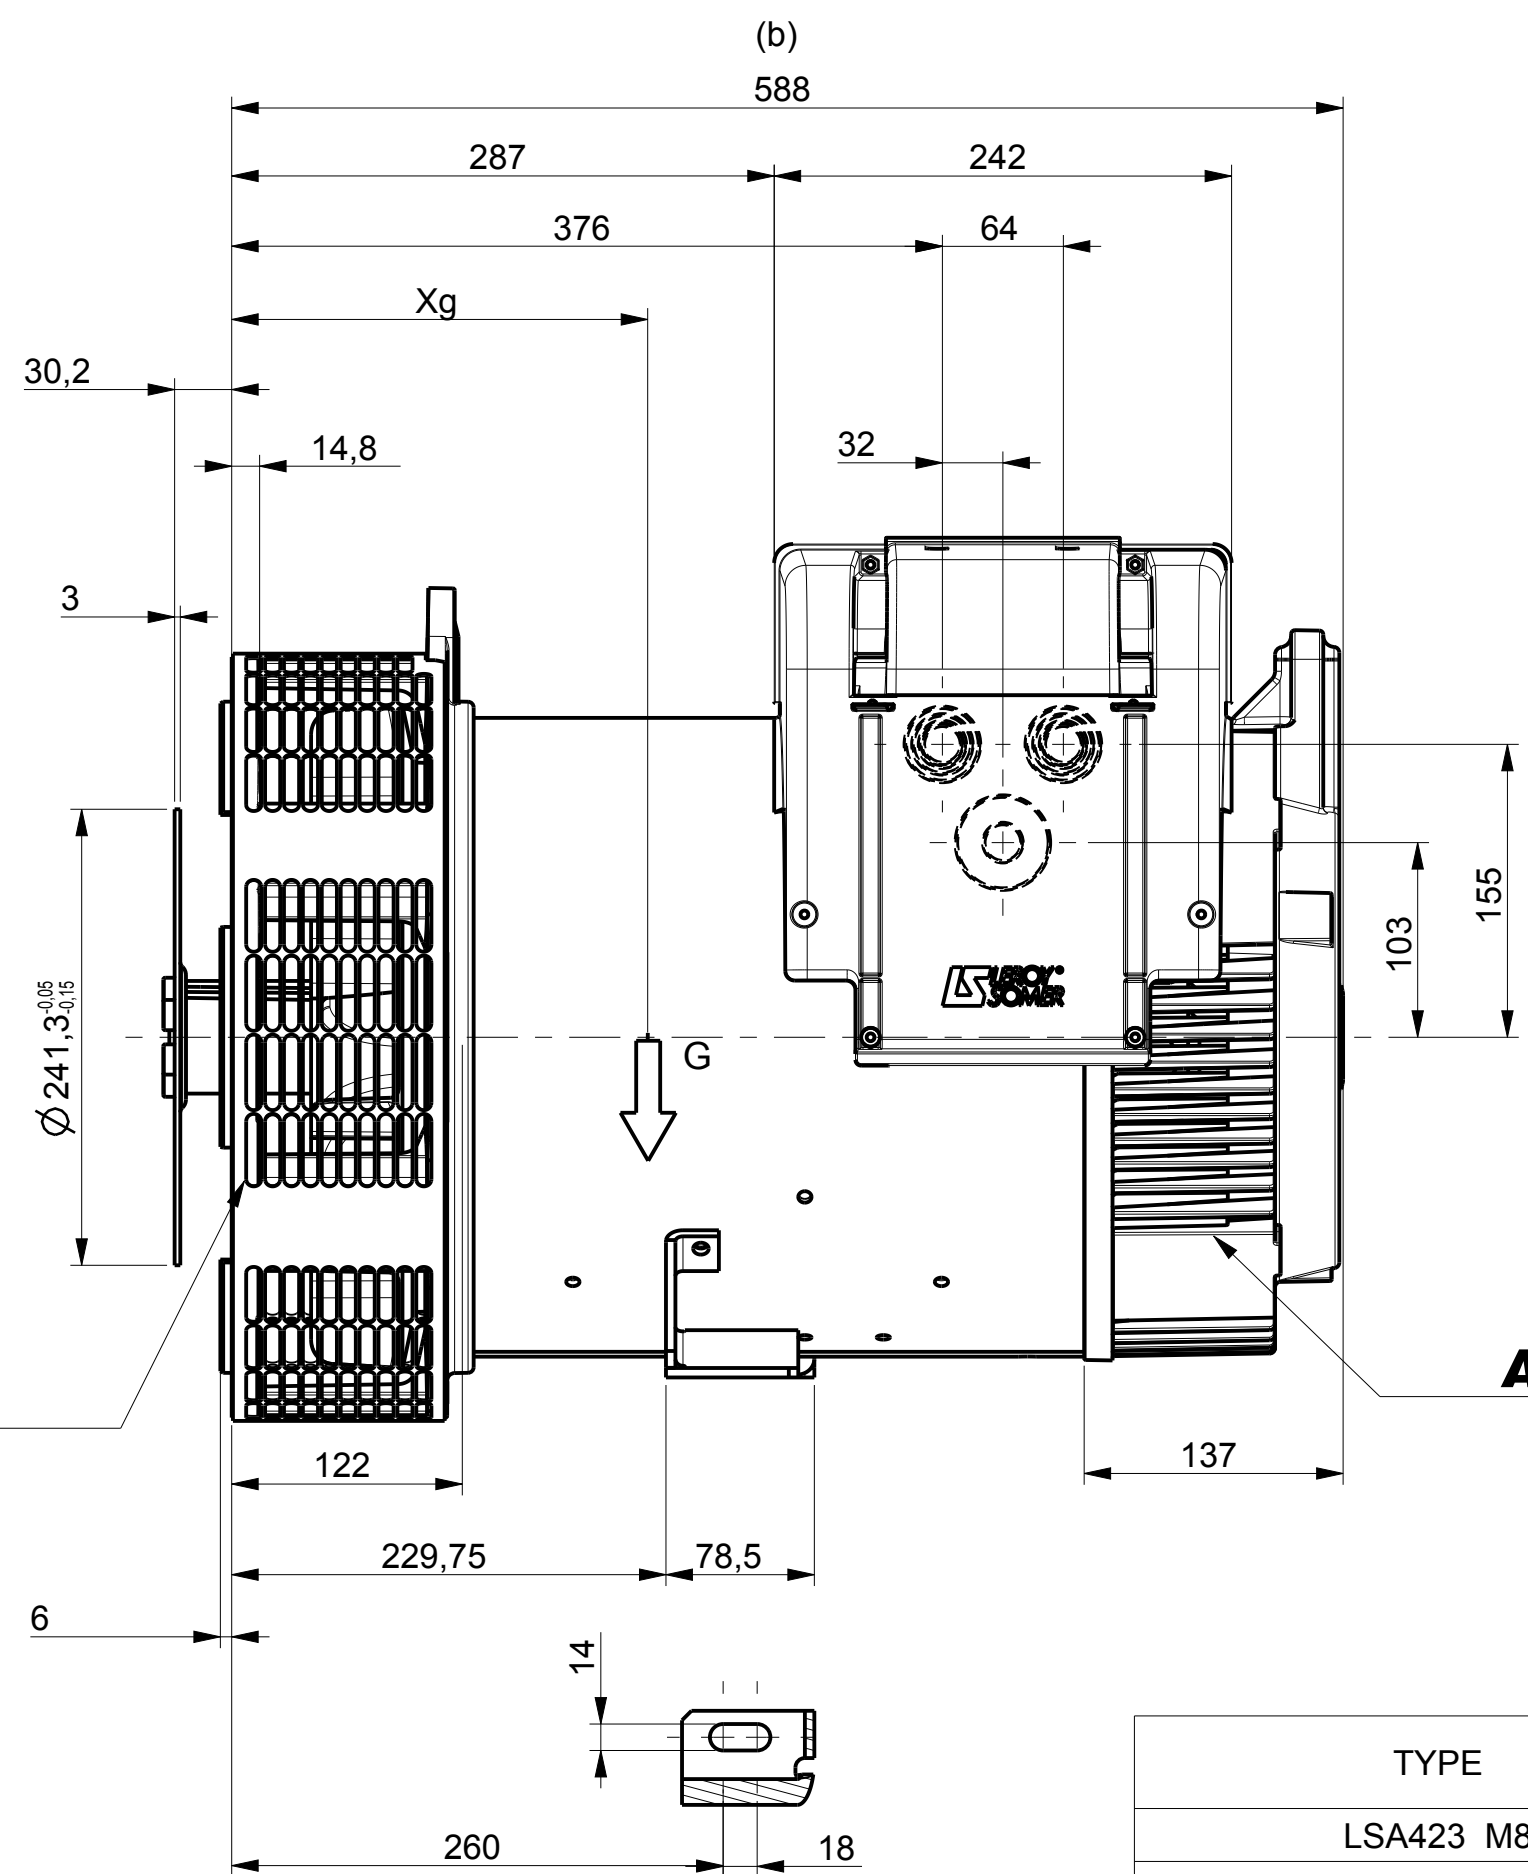


8 TROUS Ø9 sur Ø222.25 EQUIDISTANT
9 DIA, 8 EQ. SP. ON 222.25 PCD

12 TROUS Ø11 sur Ø381.00 EQUIDISTANT
11 DIA, 12 EQ. SP. on 381.00 PCD

Ø 361,95 ⁰_{-0,127}

Ø 406

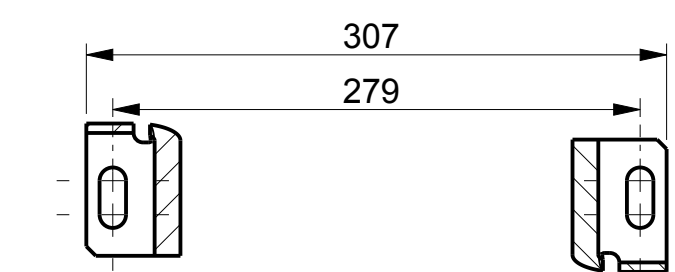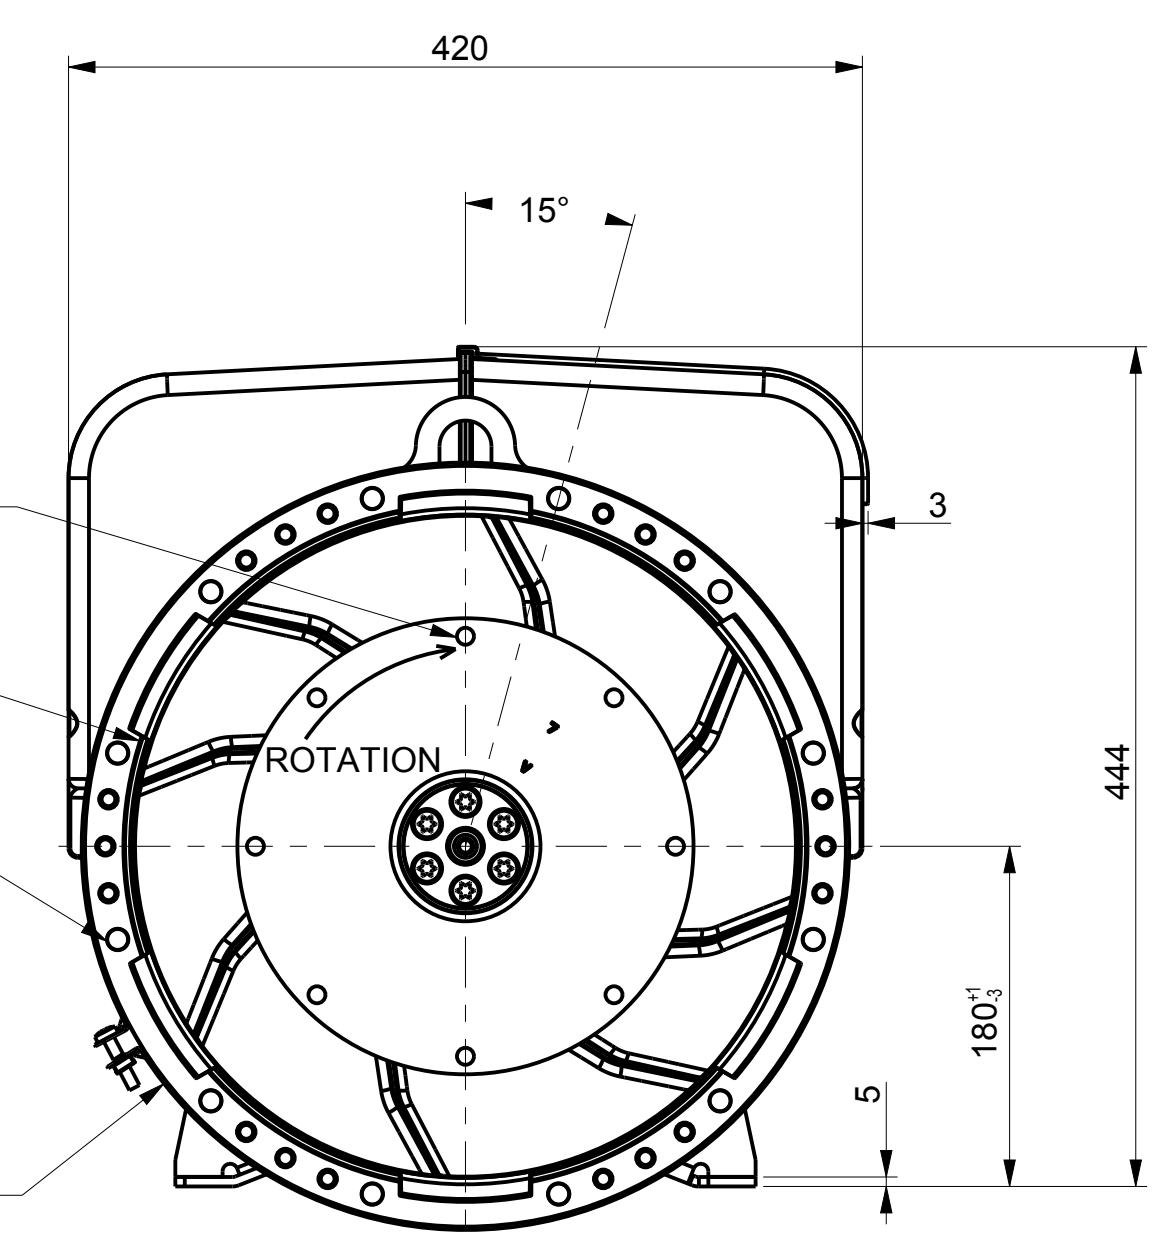


TYPE	Xg	Masse Kg Weight	J Kg ^{m²}
LSA423 M8	295	175	0.3683
LSA423 M7	287	170	0.3491


Pre perçage Ø21 Ø25 Ø32 Ø40 Ø50
Predrilling

Acces regulateur
Access to regulator

Sortie des cables Gauche vue bout d'arbre en STD
Acces regulateur Droite vue bout d'arbre en STD
Output power on left hand side view DE standard
Access to regulator on right hand side view DE standard

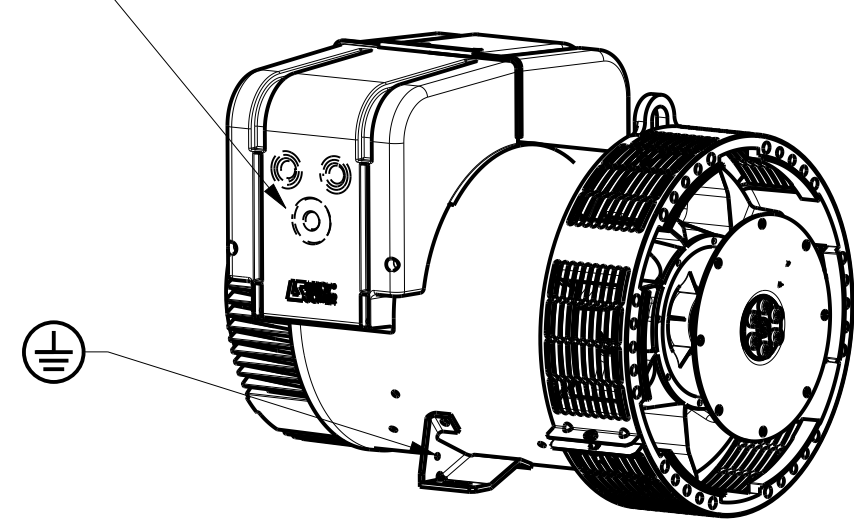

ECHELLE 0,125

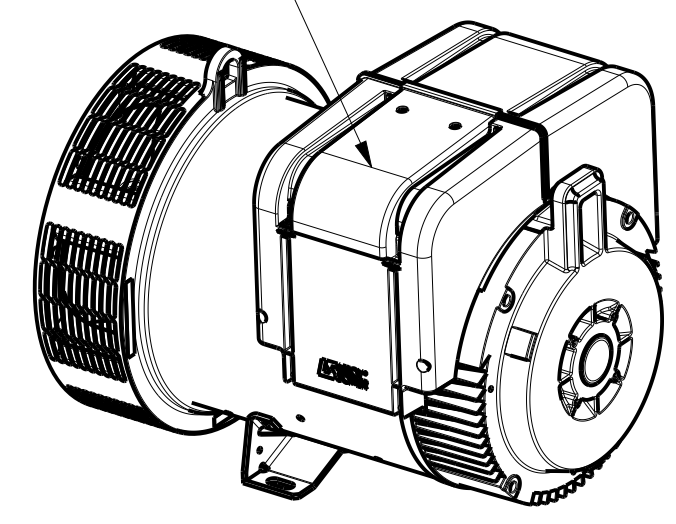

ECHELLE 0,125

CE DESSIN, PROPRIETE EXCLUSIVE DE NOTRE SOCIETE EST STRICTEMENT CONFIDENTIEL. IL NE PEUT ETRE COMMUNIQUE, COPIE OU REPRODUIT SANS NOTRE AUTORISATION ECRITE.

-	-	-	-	-	-	-
-	-	-	-	-	-	-
b	14/12/2011	cote 586 ==> 588	11-586	JMD		
a	X	X	11-226	X	X	X
INDICE	DATE	NATURE DE LA MODIFICATION	N° C.T.	NOM	VERIF B.E.	VERIF METH
Tolerances generales: - generale			Etats de surfaces (NFE 05-016) Ra: - partout sauf indications			
Ref: -			Echelle	Machine: ALTERNATEUR ALTERNATOR		
Obs: SAE 4 - 7 1/2 H=180 - M7 / M8			0,250	LSA423		
Matiere:				Designation: ENCOMBREMENT		
Modele de base: -				OUTLINE		
Variante: -						
Composant: -			 MOTEURS LEROY-SOMER 16015 ANGOULEME - FRANCE			
Compose: -						
Dessine: Debord		Verif methodes SM 19/07/2011				B
Verifie: AR						
Date: 18/07/11			A2 LSA423-8-048			