


# Panorama rudder indicator

Quick & easy reading from angles up to 250 °

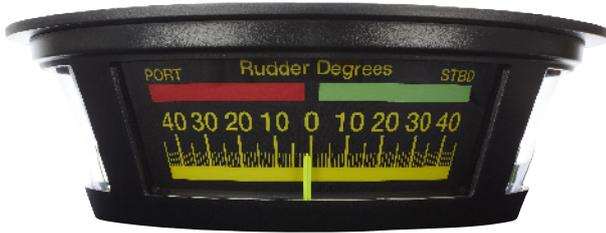

TRI-2 is applied for the indication of the rudder position on the bridge. The indicator consists of a robust moving coil system equipped with 3 pointers mounted on a common shaft. It is suitable if you require analogue input. For CAN input, please refer to the TRI-2 with CAN interface.

With its large scales, the TRI-2 ensures a quick and easy reading of the rudder position from any angle up to 250 ° and from a distance of up to 5 metres from the indicator. The TRI-2 is housed in a matt black case for ceiling suspension.

## TRI-2 features

- ▶ 3 extra large, easy-to-read scales
- ▶ Readable from up to 5 meters
- ▶ Black or white scales
- ▶ Long-life LED illumination
- ▶ Built-in dimmer
- ▶ Analogue interface or CAN

Variants	Features
TRI-2	Analogue input
TRI-2 CAN	CAN-based input

